

## Storm 5000




*Weather the Storm with your Lekos intact! The STORM enclosure family is designed to protect ellipsoidal spotlights and small-format digital projectors in any weather, assuring optimal performance and long equipment life.*

Storm enclosures keep your lighting fixtures cool and dry – extending fixture life and maximizing lamp-replacement intervals. The enclosure can be mounted at a wide range of angles, and the large projection window accommodates fixtures up to 10° field angle. Storm is available with an internal tray for mounting digital projectors.


- Designed for:** Fixed and zoom ellipsoidal spotlights (ETC Source Four, Strand SL), or similar lighting instruments, up to 1000W and 10° \* (For 5° Source Four fixtures, use Tempest Lighting Typhoon enclosure)  
Smaller Digital Projectors (up to 5000 lumens) – contact us with dimensions and power
- Enclosure:** Non-Corrosive fiberglass composite body  
Coated steel and aluminum structure and hardware  
Optically clear glass window

- Options:** Ballast Fixture Kit  
 16" Globe Head (for Clay Paky Miniscan and similar fixtures)  
 Universal Projector Tray
- Mounting:** External - Coated Steel Yoke  
 Internal - Custom Yoke bracket/tray system (Coated Steel)
- Finish:** Urethane coating, standard color; White, Beige, or Gray  
 Custom colors to special order
- Cooling:** Forced air cooling provided by AC fan  
 Washable, replaceable open-cell foam filter on intake
- Electrical** Connections made in internal electrical box  
 Enclosure: 115VAC or 220/230 VAC, max 25W  
 Luminaire: 115VAC or 220/230 VAC 50/60Hz, 1000W max.


**Dimensions:**

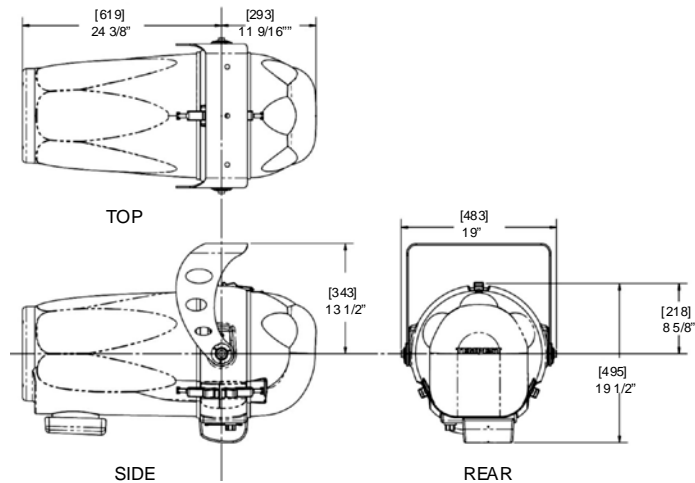

**Assembly:**

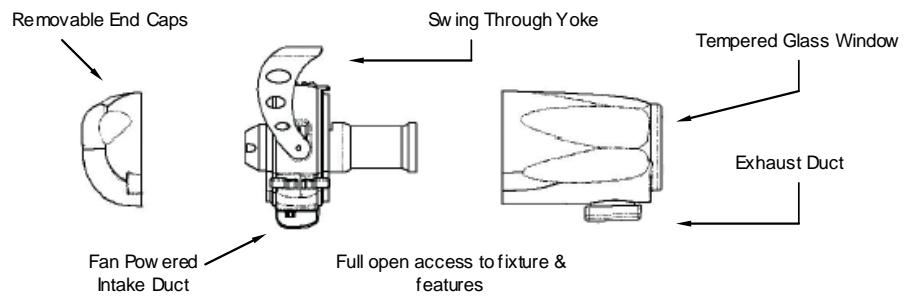

### Mounting Guide:

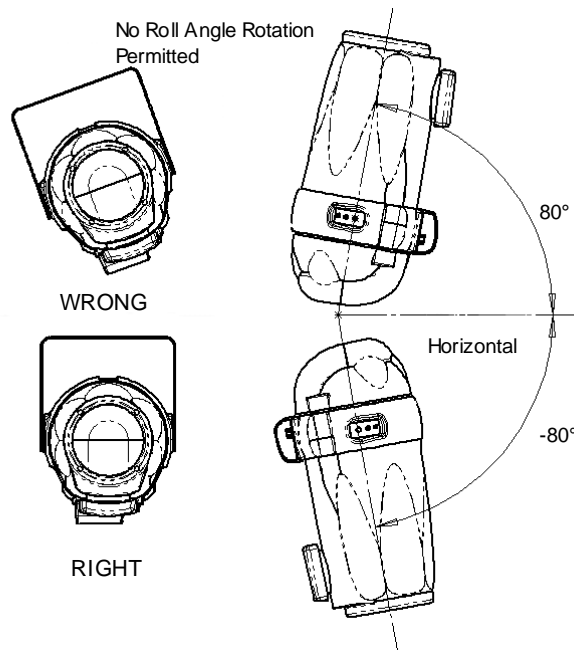

### Weight

Empty enclosure weight – 40 lbs (18kg)

### Shipping

Shipping Box 1: 24"x20"x20" (61 x 51 x 51 cm), 15lbs (6kg)

Shipping Box 2: 24"x20"x20" (61 x 51 x 51 cm), 15lbs (6kg)

Schedule B Export Code: 8536.30.0000

### Specification

Unit shall be a Tempest Lighting catalog number 5000. Unit housing shall be non-corrosive fiberglass composite. Further, unit shall possess filtered forced-air ventilation, which will draw less than 25W of power from the luminaire circuit. Unit shall be ETL listed to U.L., standard 50 for wet locations and be a NEMA type 3R enclosure. Unit shall also have above ground connection ports. Unit shall have minimum 9" diameter projection window. Unit shall be identified as The Storm Enclosure, manufactured by Tempest Lighting, Inc., of North Hollywood, California, USA.

### Approvals

ETL and cETL listed to UL Standard 508 (7/11/05), CE. NEMA Type 3R.



NEMA type 3R

*This product is covered by US Patent Number 6,352,358.*

*In the interest of continuous product improvement, specifications are subject to change without notice*

*\* 10° Source Four requires removal of gel frame clips*

### Tempest Lighting, Inc.,

5401 Bevis Avenue, Sherman Oaks, CA 91411, USA

www.tempestlighting.com info@tempestlighting.com

t: +1 818 787 8984

f: +1 818 787 4994

