




Graze Louvers

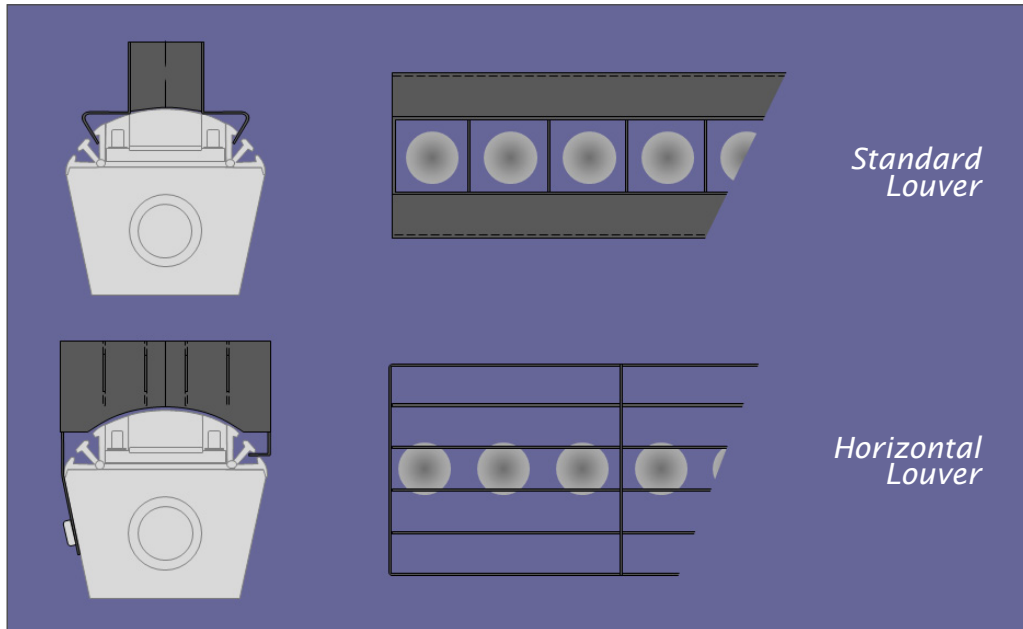

Choose from two styles of louver for Philips Color Kinetics Color Graze and eW Graze fixtures. The standard louver snaps positively into Graze's top extrusion, and provides a 45° cutoff in all directions. The horizontal louvers cut

at 40° in the vertical axis, while leaving the horizontal axis virtually unrestricted. Horizontal louvers are mounted using M5 stainless screws (provided), fixing to the hinge mounting locations on the opposite side to the standard Graze mounting hinge. All Tempest Graze louvers are double plated, then epoxy powder coated, for long life and superior corrosion resistance.

Tempest Graze louvers are the same length as their respective fixtures, allowing contiguous runs to be installed without gaps.


For Use with:

Philips Color Kinetics Color Graze Powercore

Philips Color Kinetics eW Graze Powercore

Part Number	Description	✓
4782.12	Standard Graze Louver, 12"	
4782.24	Standard Graze Louver, 24"	
4782.36	Standard Graze Louver, 36"	
4782.48	Standard Graze Louver, 48"	
4782.12H	Horizontal Graze Louver, 12"	
4782.24H	Horizontal Graze Louver, 24"	
4782.36H	Horizontal Graze Louver, 36"	
4782.48H	Horizontal Graze Louver, 48"	

Don't forget to specify Tempest Graze Wall mounting arms for your wall grazing project! Standard offsets at 4", 8", 12", 24", with custom lengths and double-mount arms available to special order.

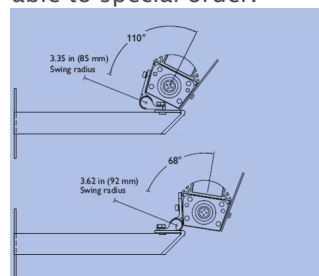

www.tempestlighting.com for more information.

Job Name	
Location	
Architect	
Designer	



Tempest Lighting, Inc

13110 Saticoy Street, Unit C, North Hollywood, CA 91605, USA
www.tempestlighting.com info@tempestlighting.com
 t: +1 818 787 8984 f: +1 818 982 5510